



Applications

- ◆ Vocal Announcements
- ◆ Communications
- ◆ Conferences

The AD696/AA microphone base can be connected to the microphone input of a PC to launch announcements on the speaker network through the Tema ADAM audio management software.

The table base is equipped with a "Talk" switch to enable the microphone and a button to activate the speech output.

The microphone is protected by a black windproof polyurethane foam cap.

The flexible arm at two points is removable and is fixed on the base with a standard XLR connector.

"Always on" mechanical function.


The microphone, of high quality, allows to transmit crystal-clear and intelligible voice announcements.

Technical Features

Microphone capsule	: electret condenser
Polar diagram	: cardioid
Frequency response	: 50-16.000Hz
Output impedance	: 1000 Ohm
Sensitivity	: -40dB (0dB 1V/Pa @1Khz)
Controls	: 1 "Talk" switch, 1 button
Power Supply	: from the PC microphone jack
Arm	: flexible gooseneck with 2 points, removable, with XLR connector
Cable	: XLR Fem-Jack 3,5 male

Arm length	: 455mm
Body	: shock resistant metal alloy
Windproof cap	: black polyurethane foam
Cable	: 1,5mt XLRfem-Jack 3,5 + adapter
Operating temperature	: -10°-55° C
Storage temperature	: -20°+65° C
Umidity	: 0-95% non-condensing
Dimensions	: 113x140xH35mm (without arm)
Weight	: 0,52 kg cable included

AD696/AA microphone base connected to a PC with ADAM audio management software

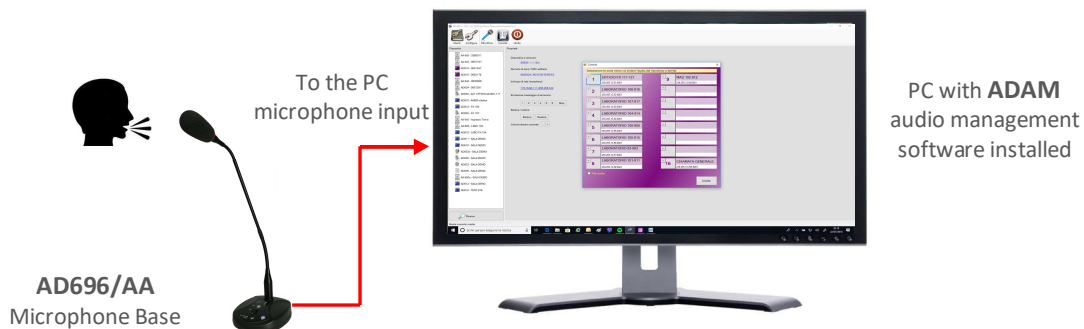

Cable 1,5mt XLR female – Jack 3,5 3 way



Adapter for PC combo Jack 3,5 4 way